



# TRAILVIEW COLLECTION MANUAL



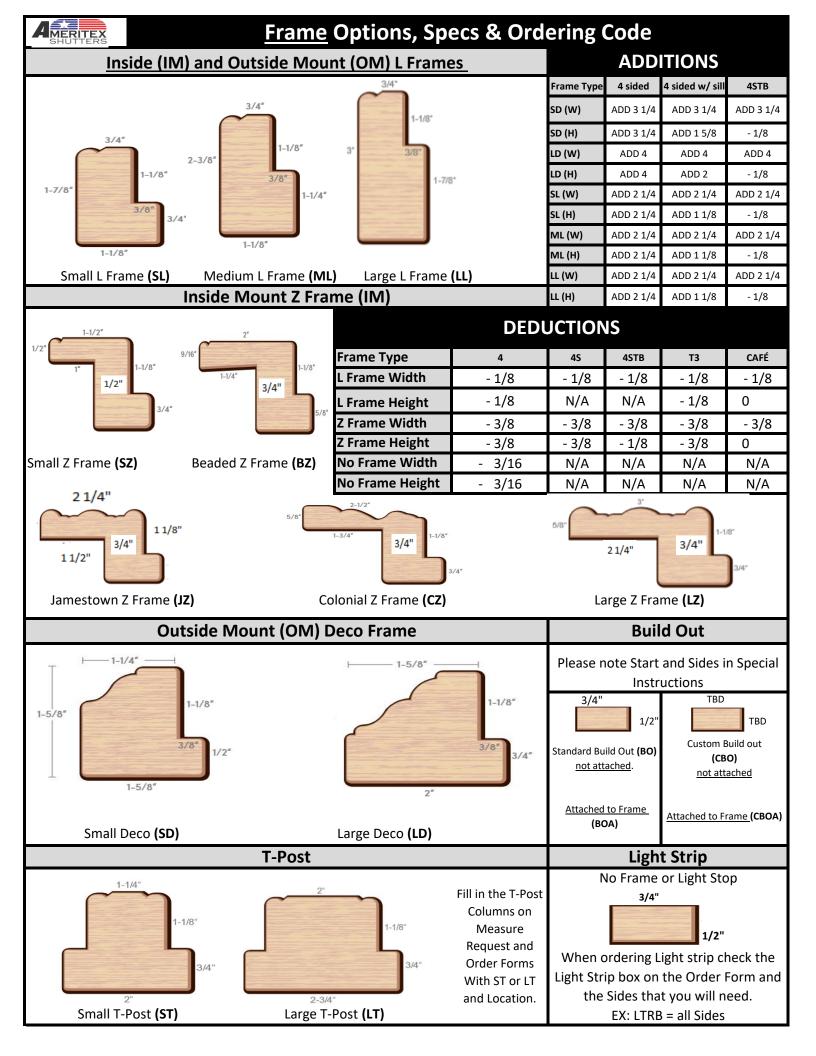

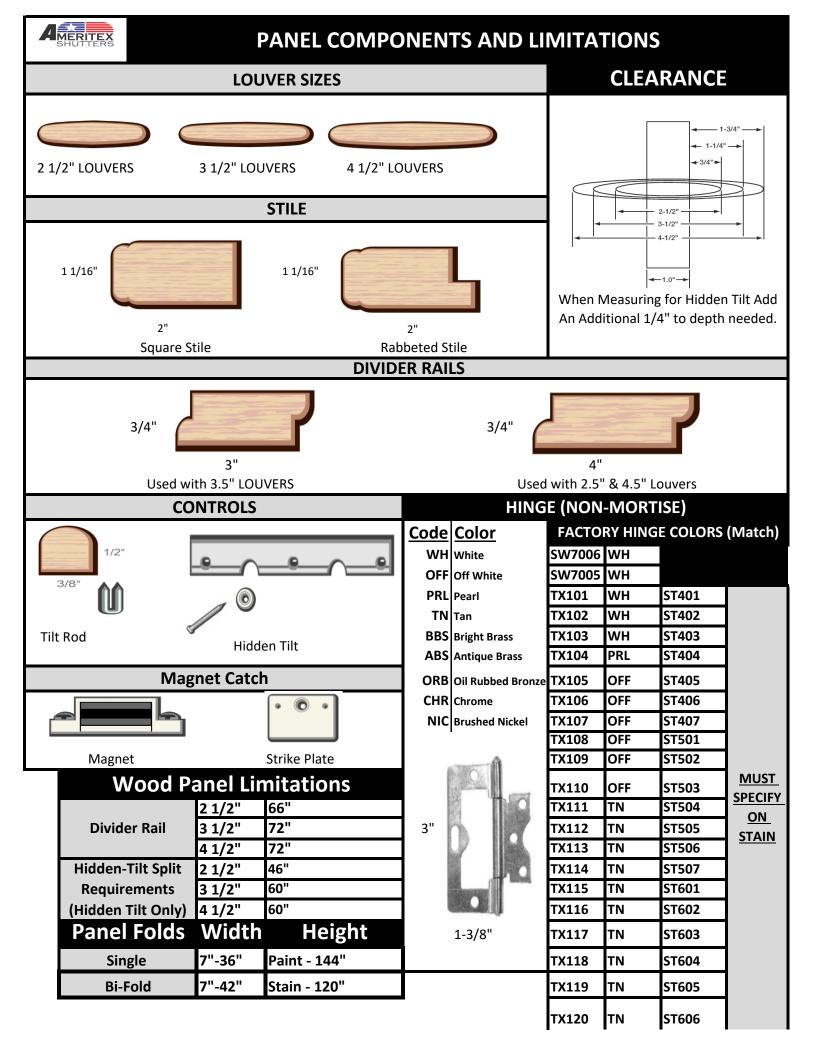

# **How to Measure**

# Inside Mount (IM) Measurements

Provide the Smallest opening measurements. Inside Deductions will be shown on contract and drawings as a NWF.


# **OUTSIDE MOUNT (OM) Measurements**

Provide the Largest opening measurement. Outside Additions will be shown on contract and drawings as a NWF.


# **Net With Frame (NWF) Measurements**

Provide the Maximum Width and Height. Shutter will be made to exact measurement from tip to tip.

## FRAME NOTCHING & BUILD OUT









Window Crank Handle Notch \$50.00 Per Opening

Always Measure from the Left side of opening. Start (S) point, End (E) point and Depth (D).

EX: S:10" E:15" D:3/8

**Z Frame Notching For Tile** 

\$50.00 Per Opening

Provide Side (Left, Right, Top, Bottom) Start (S) point, End (E) point and Depth (D). EX: L S: 0" E:9-7/8" D: 3/4"

**Deco & Z Build Out** 

**Back of Frame** 

Provide Side (Left, Right, Top, Bottom) Start (S) point, and Thickness (T). EX: Left Right Top S:2-1/2"L 2-3/8"R T:3/8"

L Frame Build Out

Side of Frame

Start (S) point, End (E) point and Thickness (T) Width (W). EX: S:8-5/8"Left & Right E: 34-1/2" T:

# **FRAME SIDE CODE**











4 Sided (4)Frame on all four sides

4 Sided w/ Sill cut Bottom (4S). **Z** Frame Flange cut off

of the frame.

**Deco Frame** 3/4" cut off on both deco frames

4 Sided w/ sill cut top & Bottom (**4STB**). 3/4" cut off on both deco frames on TOP & BOTTOM

3 Sided w/ no bottom (T3). Frame on Left Right and

3 sided w/ no top (CAFÉ). Frame on Left Bottom and Right.

# NO FRAME DIRECT MOUNT

Ameritex Shutters provides two ways that Direct Mount Shutter can be ordered.

- 1. Provide Ameritex Shutters with the exact window opening labeled as a IM and we will deduct 3/16" Total.
- 2. Provide Ameritex Shutters with the measurement you would like the panel to be and mark the NWF box. Ameritex Shutters will make your panel that exact size.

If you select Direct Mount please check box on measure request and order forms if you would like light strips to be provided with the panel.



### **DOUBLE HUNG**



Provide the Split measurement in the special instructions section of measure request and order forms.

# **ADDITIONAL MANUFACTURING CHARGES CUSTOM PAINT MATCH**

\$1.00 per sqft (Additional 1 time Surcharge of \$150.00 per order). A sample of the paint will need to be provided if it is NOT a Sherwin Williams <u>Color Number</u>. Ameritex Shutters will send a Paint sample to the dealer for verification and approval.

# **CUSTOM STAIN MATCH**

\$2.00 per sqft (Additional 1 time Surcharge of \$150.00 per order). A sample of the stain will need to be provided if it is NOT a Sherwin Williams Color Number. Ameritex Shutters will send a Stain sample to the dealer for verification and approval.

# **ARCH WINDOWS**







Full Rake Shutter (RK)




1/2 Rake Left (RK L)




1/2 Rake Right (RKR)

# **SPECIALTY ARCH**



**Eyebrow Arch** 

(EYE)



Octagon Shutter (Octo)-Please provide a template **How to Price Specialty Shape** (Circle, Oval, Octo, etc....): Arch sqft \$ x 2. Minimum 6sqft.

**Circle Shutter (Circle)** 

Oval Shutters (Oval)-Please provide a template



# **MEASURE AND INSTALL SURCHARGES**



**BAY WINDOW** \$150.00 Per Bay



**DIRECT MOUNT** \$25.00 Per opening

Tall Ladder- Windows that the top of the opening is 12 FT or greater in Height.

Blind Removal- The removal of Blinds & Shades for shutters to be installed. Disposal included.

Shutter Removal- The removal of Shutters so new shutters can be installed. Disposal included.

Moving Furniture- Ameritex Shutters installers will not move furniture without responsibility waiver signed.

**High Rise**- Please note on Measure request and order form if the Shutter needs to be assembled on site.

**Temp Shades**- Check box on the Measure request on which windows you would like covered. This must be done at time of measure.

Drapery Removal - Place quantity in the box on Measure Request and Order Forms.

# **CHAIR RAIL NOTCHING**

## **TILE INSTALLATION**



Ameritex installers will cut the Chair Rail. No Additional Charge.



Tile installation

### **REMOVAL DISCLOSURE**

There is a risk of damage when removing Blinds, Shades, Shutters and Drapes due to screws and/or nails attaching the window covering to the wall. We will do our best to minimize damage, However we will not be responsible to any repairs costs associated with the removal.

### **WILL CALL**

### **FOAM WRAP**



WILL CALL ONLY NO ADDITIONAL CHARGE




### WILL CALL & DELIVERY

Comes with Foam Wrap. Check the Package for Transport box on Order Form.



# ADDITIONAL MANUFACTURING CHARGES FRENCH DOOR CUTOUTS

ALL DIMENSIONS ARE NWF SIZE, BASED ON SHUTTER

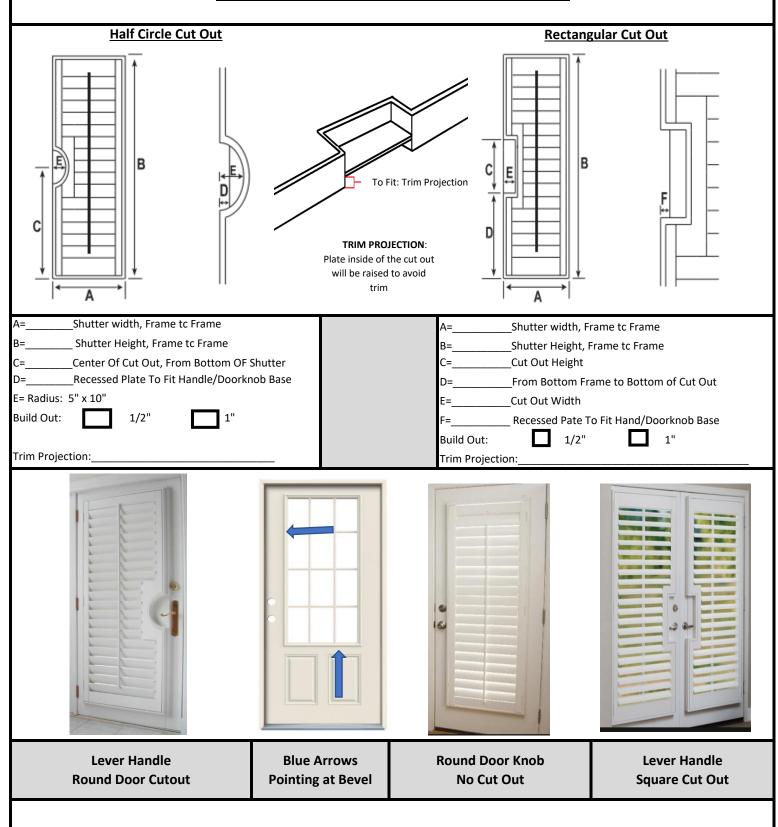

If the Door has a bevel (Picture Above)Ameritex Shutters measures the Tip to Tip width and height of the bevel (Door With Blue Arrows). Which makes these applications **NWF** on the order sheet. **Make sure that you are aware of what door handles** are on the door or will be installed if handles are not present.

# FOAM WRAP

WILL CALL ONLY
NO ADDITIONAL CHARGE



### **DELIVERY**

Comes with Foam Wrap. Check the Package for Shipping box on Order Form.

NO ADDITIONAL CHARGE

# **Break Down For Shipping**

Due to limits set by shipping companies. Ameritex Shutters will splice all frames that exceed 86" for shipping purposes.